

Wiselib: A Generic Algorithm Library for Heterogeneous Sensor Networks

Tobias Baumgartner¹, Ioannis Chatzigiannakis^{2,3}, Sándor Fekete¹,
Christos Koninis^{2,3}, Alexander Kröller¹, and Apostolos Pyrgelis³

¹ Braunschweig Institute of Technology, IBR, Algorithms Group, Germany
{t.baumgartner,s.fekete,a.kroeller}@tu-bs.de

² Research Academic Computer Technology Institute, Patras, Greece
{ichatz,koninis}@cti.gr

³ Computer Engineering and Informatics Department, University of Patras, Greece
pyrgelis@ceid.upatras.gr

Abstract. One unfortunate consequence of the success story of wireless sensor networks (WSNs) in separate research communities is an ever-growing gap between theory and practice. Even though there is a increasing number of algorithmic methods for WSNs, the vast majority has never been tried in practice; conversely, many practical challenges are still awaiting efficient algorithmic solutions. The main cause for this discrepancy is the fact that programming sensor nodes still happens at a very technical level. We remedy the situation by introducing *Wiselib*, our algorithm library that allows for simple implementations of algorithms onto a large variety of hardware and software. This is achieved by employing advanced C++ techniques such as templates and inline functions, allowing to write generic code that is resolved and bound at compile time, resulting in virtually no memory or computation overhead at run time.

The *Wiselib* runs on different host operating systems, such as Contiki, iSense OS, and ScatterWeb. Furthermore, it runs on virtual nodes simulated by Shawn. For any algorithm, the *Wiselib* provides data structures that suit the specific properties of the target platform. Algorithm code does not contain any platform-specific specializations, allowing a single implementation to run natively on heterogeneous networks.

In this paper, we describe the building blocks of the *Wiselib*, and analyze the overhead. We demonstrate the effectiveness of our approach by showing how routing algorithms can be implemented. We also report on results from experiments with real sensor-node hardware.

Keywords: Sensor Networks, Algorithms, Library, Heterogeneity.

1 Introduction

Since the initial visions proposed in the SmartDust project [13] ten years ago, Wireless Sensor Networks have seen a tremendous development, both in theory and in practice. On the practical side, we see working sensor networks and applications in many areas, from academia to industrial appliances. There is a large variety of hardware and software to choose from that is easy to set up and use.

This success story has also led to a serious practical issue that has not been sufficiently addressed in the past: Sensor node brands are very different in their capabilities. Some nodes have 8-bit microprocessors and tiny amounts of RAM, while others burst with power, being able to run desktop operating systems such as Linux. Consequently, the software running on these systems is very different on the various nodes. While it is easy to write code for a specific platform, it is a very challenging task to develop platform-independent code. Even worse, the operating systems on most sensor nodes provide barely enough functionality to implement simple algorithms. This means that the developer is forced to spend great attention on low-level details, making the process painfully complex and slow.

A parallel success story can be observed on the theoretical side, where the development of distributed algorithms for many actual or hypothetical problems has grown into a research field of its own. This has led to a large variety of highly sophisticated algorithms for all kinds of tasks. Unfortunately, many of them have never been tried in practice, due to the overly difficult implementation process. Where algorithms are implemented, they are hard to share and compare, as implementations cannot be easily ported to new platforms. Moreover, many important challenges are not even addressed, as they can only be identified and resolved by close collaboration between theory and practice.

This growing gap between theory and practice forms a major impediment for exploiting the possibilities of complex distributed systems. The *Wiselib* is our proposal to remedy this unfortunate situation. We present a framework, written in C++, for platform-independent algorithm development. Each algorithm written for the *Wiselib* can be compiled for any supported system without changing any line of code. It provides simple interfaces to the algorithm developer, with a unified API and ready-to-use data structure implementations. The *Wiselib* addresses the following issues:

Platform independence. *Wiselib* code can be compiled on a number of different hardware platforms, usually without platform-dependent configurations, i.e., no “`#ifdef`” constructions. See Section 3.1 for details.

OS independence. *Wiselib* code can be compiled for different operating systems. This includes systems based on C like Contiki, as well as C++ (the iSense firmware) and nesC (TinyOS).

Exchangeability. Algorithms and applications can be composed of different components that interact using well-defined interfaces, called *concepts*. Components can be exchanged with other implementations without affecting the remaining code. Moreover, both generic components and highly optimized platform-specific components can be used simultaneously.

Broad algorithm coverage. The *Wiselib* currently covers a large variety of algorithms. It will contain algorithms for each of the following categories:

1. routing algorithms
2. clustering algorithms,
3. time-synchronization algorithms,
4. localization algorithms,
5. data dissemination, and
6. target tracking.

Cross-layer algorithms. In Wiselib an algorithm can be designed to use other algorithm concepts, thus enabling the use of existing algorithms for the implementation of more complex ones. Moreover, we can stack protocols on top of each other, extending their functionality. See Section 5 for details.

Standard compliance. The library is written in a well-defined language subset of ISO C++. This has a number of benefits over custom languages such as nesC: The compilers are more mature and better supported, and there is a large user base that knows C++ from desktop development.

Scalability and efficiency. The Wiselib is capable of running on a great variety of hardware platforms, with CPUs ranging from 8-bit microcontrollers to 32-bit RISC CPUs, and with memory ranging from a few kilobytes to several megabytes. Algorithms need to be very resource-friendly on the platforms from the lower end, and at the same time be able to use more resources if available.

To our knowledge, the Wiselib is the only successful attempt to achieve all of these goals at once. In this paper, we present the basic building-blocks of the Wiselib, and show that the flexibility of the design has barely any overhead—neither in code size nor in run-time; one can simply add new algorithms only by following the presented approach using the Wiselib interfaces. The algorithm can then run on each supported sensor node or simulation platform. Our goal is to achieve a state in which such an algorithm runs on heterogeneous sensor networks, and even more, networks in which some parts consist of virtual nodes running in a simulator.

This paper is organized as follows: The next section provides an overview of related work, covering competing approaches as well as implementations that inspired this work. Section 3 explores the problem space by discussing the target platforms on which we wish to run the Wiselib. Section 4 presents details on the design of the Wiselib. In Section 5 we describe example implementations of routing algorithms; in Section 6, we report on the surprisingly small code and memory footprint on different platforms. Section 7 describes the current distribution of the Wiselib. We conclude the paper in Section 8.

2 Related Work

Efficient algorithm libraries have a long-standing tradition on desktops and servers. The three libraries that motivated our work are the Standard Template Library (STL), the Computational Geometry Algorithms Library (CGAL) [4], and Boost [2]. They share a great programming concept that we heavily use for the Wiselib: Using C++ templates, one can construct complex object-oriented software architectures that can be parameterized for many different applications. The price of generality is paid at compile time. The final binary contains highly efficient and specialized code, so that there is no overhead at runtime.

The situation in sensor networks is not as promising. There have been approaches to overcome the issues of incompatible nodes by providing generic operating systems that run on multiple platforms. Examples are Contiki [6] and

TinyOS [20]. Neither runs on all platforms we are envisioning for the Wiselib. Even worse, both introduce new programming paradigms that are valid only for the specific targets, such as protothreads in Contiki, and the whole programming language nesC [7] of TinyOS. The C-inspired nesC attempts to allow for the construction of component architectures with early binding, similar to the Wiselib, but achieves this through introducing a new language that requires a custom compiler.

A challenging issue are heterogeneous networks. It is very simple to have nodes exchange messages if they are of the same kind, and with the same operating systems. It becomes surprisingly hard to let nodes of different brands communicate with each other, even if both of them use standardized IEEE 802.15.4 radios. A promising approach is the Rime Stack [10,5], a layered communication stack for sensor networks. It runs only on Contiki. Recently, Sauter et al. [16] demonstrated that it is possible to communicate between sensor nodes running Contiki and TinyOS. Since TinyOS uses IEEE 802.15.4, the Rime Stack and Chameleon Module had been modified on Contiki.

Another attempt to produce a well-defined environment that runs on different platforms was proposed by Boulis et al. [3]: SensorWare defines a custom scripting language; its syntax is based on Tcl. Consequently it focuses on richer platforms with at least 1 Mbyte of ROM and 128 KBytes of RAM. A similar approach is Maté [14], a virtual machine running on top of TinyOS. It targets also small devices with a very limited amount of resources, using a custom assembler-like language.

Not surprisingly, there are also attempts to run a Java Virtual Machine (JVM) on sensor nodes [17]. Squawk [18] is a JVM by Sun Microsystems that runs on Sun Spots. Obviously such an approach is not suited for low-end sensor nodes, and also not for time-critical algorithms.

A different approach are macroprogramming frameworks such as Kairos [9], Marionette [22], and MacroLab [11]. Instead of writing code for individual nodes, the whole network is addressed with a single program. This is generally achieved by providing a script language that is executed automatically on all nodes, without the need for reprogramming any node in the network.

3 Problem Space

3.1 Heterogeneity

When developing an algorithm library for sensor networks, one must deal with a great variety of different hardware and software platforms. Table 1 shows an overview of platforms that were taken into account for the development of the Wiselib.

The operating systems vary from system-specific implementations such as iSense and ScatterWeb to generic approaches such as Contiki, TinyOS, and Linux. The preferred programming languages vary with the OSs. The iSense firmware has been developed in C++, whereas the ScatterWeb firmware uses plain C. TinyOS uses a custom language, the C extension *nesC* [7]. Support

Table 1. Evaluation of potential target platforms. The columns refer to the type of microcontroller, the standard operating system, the programming language for it, what kind of dynamic memory is available, the amount of ROM and RAM, and the bit width.

Hardware	Firmware/OS	CPU	Language	Dyn Mem	ROM	RAM	Bits
iSense	iSense-FW	Jennic	C++	Physical	128kB	92kB	32
ScatterWeb MSB	SCW-FW	MSP430	C	None	48kB	10kB	16
ScatterWeb ESB	SCW-FW	MSP430	C	None	60kB	2kB	16
Tmote Sky	Contiki	MSP430	C	Physical	48kB	10kB	16
MicaZ	Contiki	ATMega128L	C	Physical	128kB	4kB	8
TNode	TinyOS	ATMega128L	nesC	Physical	128kB	4kB	8
iMote2	TinyOS	Intel XScale	nesC	Physical	32MB	32MB	32
GumStix	Emb. Linux	Intel XScale	C	Virtual	16MB	64MB	32
Desktop PC	Shawn	various	C++	Virtual	unlimited	unlimited	32/64
Desktop PC	TOSSIM	(ATMega128L)	nesC	(Physical)	unlimited	unlimited	(8)

for dynamic memory, `malloc()` and `free()`, is only available for some systems. Using the ScatterWeb firmware, the size of all memory blocks must be known at compile time, whereas the iSense firmware provides a full implementation for the C++ operators `new` and `delete`. This is done with the aid of an own memory allocation implementation. Similar approaches are provided by TinyOS via *TinyAlloc*, and Contiki via the *managed memory allocator* or *memb block memory allocator*. Only the Linux-based node supports virtual address space for processes. There are also significant differences in the amount of available memory, ranging from a few kilobytes to 64 MByte in the GumStix. Finally, we must also deal with different bit widths. The Atmel Atmegas are 8-bit microcontrollers, the MSP430 are 16-bit microcontrollers, whereas the rest are 32-bit microcontrollers. There are a number of challenges stemming from the nodes' properties and capabilities. These became additional library requirements.

Limited Memory. The algorithms may run on tiny microcontrollers for which the provided memory is very limited. On the one hand, this affects the ROM. The generated code for an algorithm must be as small as possible to fit into memory. On the other hand, the RAM is affected. Routing tables, for example, cannot be arbitrarily long so as not to exhaust the limited main memory. Additionally, the node representation that is used for storing the neighborhood must be as small as possible, but must also meet the demands of the used algorithms. At the same time, when running on a node with plenty of memory, performance gains can and should be achieved by employing more advanced data structures.

Physical Dynamic Memory. The availability of dynamic memory allocation is already a big step forward, allowing for efficient data structures. However, most implementations only provide physical addresses, and some are even unable to join adjacent freed memory blocks. Shifting of pages to join free blocks is impossible on all nodes with physical memory. Even a simple vector implementation with $O(\log n)$ amortized insertion time would leave behind a trail of $O(\log n)$ free blocks of various sizes. Therefore, data structures must be carefully re-analyzed to take these special considerations into account.

Limited Computation Power. Because algorithms may run on small microcontrollers, efficiency plays an essential role. Examples are message reception in

an interrupt or iterating over a neighbor table to select the next routing node. This also constrains the Wiselib not to enforce the use of slow operations (such as excessive pointer indirection) through the provided framework.

Compiler Variance. Our library must run on multiple hardware platforms. Different compiler versions must be supported, so it is important that only standard features of the selected programming language are used.

Data Access. When accessing data at arbitrary locations in memory, alignment problems can occur. For example, a cast of a 16bit integer works for both MSP430 and Jennic, when it starts at an even address. But when it starts at an odd address, it fails on both platforms. However, a cast of a 32bit integer works on all even addresses on a MSP430, but for Jennic only on quad-byte boundaries.

Moreover, when exchanging data in heterogeneous systems, the byte order must be taken into account, because some systems are big endian, whereas others are little endian.

3.2 C++ in Embedded Systems

The Wiselib must cover all of the previously mentioned hardware and software platforms; the latter are developed in different programming languages. Hence, an appropriate programming language must be found. We chose C++ [19], because it combines modern programming techniques with the ability of writing efficient and performant software. The use of C++ in embedded systems has already been evaluated [12]. Based on this report and own evaluations, we selected a subset of the language to be used in the Wiselib.

C++ allows modern OO designs. Object-Oriented programming is standard on the desktop for quite some time by now, and has proven to ease the development of complex systems. Moreover, C++ is a fully typesafe language. This speeds up the development process, as it catches type errors at compile time. Given the tediousness of debugging on sensor nodes, this is a huge achievement.

The most important language feature for the Wiselib are templates [21,1]. Templates can be used to develop very efficient and flexible applications. The basic functionality of templates is to allow the use of generic code that is fully resolved by the compiler when specific types are given. Thereby, only the code that is actually needed is generated, and methods and parameters as template parameter can be accessed directly. We use the well-established technique of template-based “concepts” and “models”, where the former are not specified as actual code, but rather as formal specifications in documentation. It lists the required and provided types, as well as member function signatures. Models are implementations of concepts, using template specializations, without any inherent runtime overhead. Both concepts and models allow for polymorphism, including multiple inheritance. These techniques are used successfully in standard C++ libraries, such as the STL, Boost [2], and CGAL [4]. The Wiselib employs these methods in the same manner, i.e., using standard compiler features without custom additions.

Another basic feature in C++ is virtual inheritance. When declaring a method as `virtual`, the compiler has to generate a vtable consisting of function pointers

Table 2. Availability of C++ compilers for selected platforms

Architecture	Compiler	Binary	Base	libstdc++	Basic C++	Syntax	Templates
Jennic	ba-elf-g++	✓	GCC 4.2.1	✓	✓		✓
MSP430	mmsp430-g++	-	GCC 3.2.3	-	✓		✓
ATMega128L	avr-g++	-	GCC 4.1.2	-	✓		✓
Intel XScale	xscale-g++	✓	GCC 3.3.1	✓	✓		✓

to the appropriate methods. Whenever such a method is called, it has to be looked up in the `vtable` first, thereby requiring pointer indirection. This leads to an increase of both program memory and run-time, and makes some compiler optimizations impossible. Hence, we do not use virtual inheritance in the Wiselib. We substitute this feature by templates.

Two more features that are not used in the Wiselib are run-time type information (RTTI) and exceptions. Both result in significant runtime and code-size overhead, as already shown in [12].

There are C++ compilers available for all of our target platforms. See Table 2 for an overview. Some platforms lack support for `libstdc++`, which includes the operators `new` and `delete`. The STL is also not available everywhere. All compiler support the C++ features we build upon, i.e., template and member specializations.

All compilers are based on GCC, and thus there are no considered drawbacks from compiler incompatibilities. There are some minor limitations due to the missing `libstdc++` on some systems, which have no impact on the Wiselib.

4 The Wiselib

The core design pattern for the Wiselib are generic programming techniques that are implemented using C++ templates. The basic idea is to pass the important functionality as template parameters to an algorithm: implementations of OS specific code, and data structures. Hence, it is possible to compile an algorithm exactly for the current needs.

4.1 Architecture

The fundamental design principle of the Wiselib consists of concepts and models, which have already been discussed in Section 3.2. We feature an architecture with three main pieces: algorithms, OS facets, and data structures. The idea is shown in Fig. 1.

First of all, there are concepts for algorithms. There is one concept per category, whereby a category groups algorithms by their basic functionality, e.g. routing or localization. Any algorithm model implements one or multiple concepts, and is basically a template expecting various parameters. These parameters can be both OS facets and data structures.

OS facets represent the connection to the underlying operating system or firmware—for example, concepts for a radio or timer interface. Thus, the facets

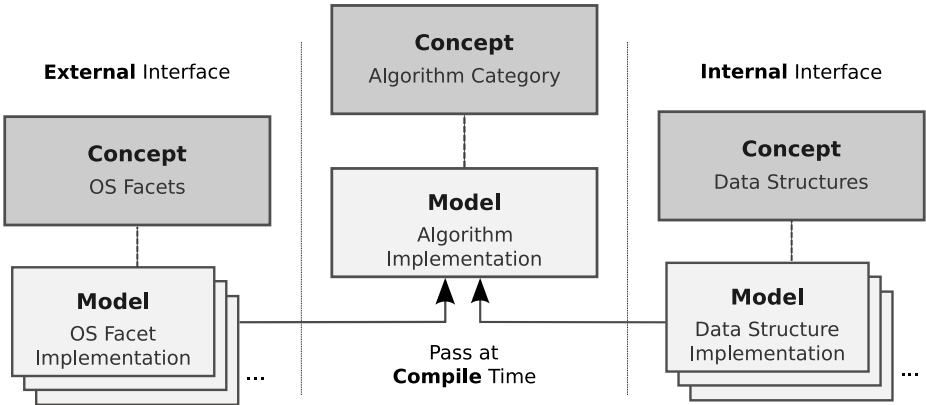


Fig. 1. Wiselib Architecture

provide a lightweight abstraction layer to the OS. Note that the facets are merely type definitions and wrapper functions, they are supposed to contain no replication of OS functionality.

With the aid of data structures, an algorithm can scale to the platform it is compiled for. For instance, static data structures can be passed on tiny platforms without dynamic memory management, whereas highly dynamic and efficient data structures are passed on powerful microcontrollers or desktop PCs.

4.2 External Interface

The “external interface”, consisting of OS facets, represents the connection to the underlying OS. Implementations of these facets are passed to an algorithm as template arguments. The compiler should mostly be able to directly resolve such calls to the OS. For example, when registering a timer can be done using one line of code, it is implemented as an inline function in the appropriate timer model. Hence, the result would be a direct call to the OS function, and thus there would be no overhead, neither in code size nor in execution time. In C-based operating systems (we see TinyOS in this group), the OS facets have to provide a translation between C++ member function calls and C function calls, and they have to convert C++ members to C callback pointers. This is where an actual price of generality has to be paid. Fortunately, as we report in Section 6, this price is very low.

Several models of the same concept for an OS facet can also be made available, each with its own advantages for special purposes. The user can pass the best available model to an algorithm at compile time, without extra overhead.

An example for a model of the OS facet “radio” is as follows. It is for the C++-based iSense firmware:

```

1 template<...> class iSenseRadioModel {
2   static int send(Os *os, id_t id, size_t len, data_t *data)
3   { os->radio().send( id, len, data, 0, 0 ); }

```


The example shows the implementation of a simple send method offered by a radio model. Since it is only one function call, it can be directly resolved by the compiler without generating any overhead.

Concept Inheritance. The above example of the radio’s `send()` method with destination address and payload is defined in the basic radio concept. Routing algorithms, for example, which do only need to send and receive messages without any further information such as RSSI values, or requirements such as reliable delivery can use implementations of this concept.

We also allow for concept inheritance, so that the basic radio concept can easily be extended. If an algorithm needs access to RSSI (or LQI) values, a derived concept can be used. It extends the basic one with a receive method that provides additional values.

Stackability. A major design aspect for the radio concept is stackability, i.e., the possibility to build a layered structure of multiple radios. The topmost layer is not aware to which and how many layers it is connected. The big advantage of this approach is that we can build a “virtual radio” that runs on top of a radio model, and is passed to an algorithm in its radio template parameter. Doing so, we can easily implement an algorithm for heterogeneous sensor networks. It is even possible to communicate between nodes that use different kinds of node IDs—because the virtual radio hides the real node addresses and provides, e.g., generic 128 bit addresses.

Another possibility is to hide a complete routing algorithm behind an OS facet. For example, when writing out debug messages, this happens generally to the UART. But by passing another model, we can forward debug messages over a routing algorithm to a gateway, where all these messages are collected. The topmost algorithm does not need to be aware of the model it works on—it must only use the appropriate concept.

Message Delivery in Heterogeneous Systems. Another problem that is addressed using our software design is message delivery in heterogeneous networks. There are basically two problems that occur: different byte-order, and differences in alignment handling. Byte order issues are solved by sticking to network byte order in messages. Alignment is addressed via template specialization. We provide a serialization class that provides generic `read` and `write` methods for all data types.

4.3 pSTL

Not all of our target systems provide dynamic memory allocation. To our knowledge, no variant of the STL fulfills our requirements: not using `libstdc++`, `new/delete`, exceptions, and RTTI.

Consequently, we provide the pSTL, an implementation of parts of the STL that does neither use dynamic memory allocation nor exceptions nor RTTI. We ensure that each of the provided data structures works on each supported hardware platform. At the moment, implementations for `map`, `vector`, and `list` are available. Naturally, the pSTL will grow with increasing demand.

4.4 pMP

For many tasks in embedded systems, multi-precision arithmetic is needed, e.g. for cryptographic and data aggregation purposes. Currently there exist a number of software libraries that implement big-number operations, e.g., gnuMP [8]. Such libraries heavily rely on dynamic memory allocation to represent big-numbers and carry out the operations. Moreover, to achieve performance speedups, highly optimized assembly code is used, taking advantage of specific hardware instructions. Unfortunately, the hardware types used in WSN platforms (e.g., AT-MEGA, Jennic) support neither dynamic memory allocation nor the specific hardware instructions used by gnuMP and other libraries. Hence it is very difficult to port such implementations to our platforms, if not impossible at all.

Therefore, we provide the pMP, an C-based implementation of big-number operations that does not use dynamic memory allocation. Of course such a library cannot be compared in terms of efficiency with gnuMP, but it is the only one available currently. In particular, it implements some basic operations like xor, shiftleft and modulo multiplication operations which are required for elliptic curve cryptography. It is certain that the pMP will grow regarding future needs.

4.5 Algorithm Support

The central piece of the Wiselib are the algorithms. They are grouped into categories, see Section 1. Algorithm implementation can belong to several categories, which is common for cross-layer algorithms.

Each algorithm class consists of a concept for the algorithm itself, and some concepts for the data structures that are typically necessary for this class. This decouples the algorithm logic, which is invariant over different platforms, from data storage, which heavily changes when an algorithm is ported to a platform of different characteristics.

The benefit of having a well-defined algorithm interface is that algorithms are easily interchanged for testing purposes, ideally this is done by simply altering a class name in the initialization code. The second—much more important—benefit is that an algorithm developer can start coding by copy-and-paste, instead of having to go through a design phase. Such a design phase can be quite lengthy, if the goal is to achieve maximal portability. Until now, theoreticians wishing to evaluate high-level algorithms often found it hard to develop for embedded devices: this lowers the bar considerably.

Providing a diverse set of data structure implementations serves the goal of scalability: For each data structure, e.g., routing tables, neighborhood cluster maps, and position maps, a set of implementations matching the span of platforms is provided. For low-end architectures such as the MSP430, structures are needed that use static storage whose size is known at compile-time. Such structures will inevitably be inefficient in terms of runtime. For high-end architectures using Xscale processors or simulation environments, highly optimized data structures with dynamic memory management and huge memory overhead can be employed, resulting in high efficiency. It is even feasible to utilize the

STL. The choice of data structures has no impact on the algorithm code, and can simply be configured at algorithm initialization. This results in algorithms that not only scale down to very limited devices, but also scale up to powerful nodes, utilizing all the available resources on them.

5 Case Study: Secure Routing Algorithms

We show the benefits of C++ and template-based design by presenting two examples: routing and cryptography algorithms. First we present either of the approaches as a single concept. Then we show how easily individual implementations can be combined to generate secure routing algorithms.

Routing Algorithms. When designing a concept for an algorithm class, one wishes to cover all kinds of special case, while staying as generic as possible. This is because each method in the concept must be implemented by each model. Hence, our concept for a routing algorithm consists of only six methods.

First, we need a method for setting the pointer to the `OsModel` that is needed when calling static member functions from the External Interface. Then we have two methods for enabling and disabling the routing algorithm, which is useful when the routing should only be run in certain points in time, for example for energy-saving issues. Next, a potential user of the routing algorithm must be able to register and unregister a callback for message reception. At last, there is the method for sending messages to other nodes in the network. The Routing Concepts specializes the Radio Concept, so that routing algorithms can be used as virtual radio interfaces for other algorithms. The concept looks as follows:

```

1 concept Routing {
2     void set_os(OsModel* os);
3     void enable(void);
4     void disable(void);
5     void send(node_id_t receiver, size_t len, data_t* data);
6     template <class Callee, void (Callee::Method)
7               (node_id_t, size_t, data_t*)>
8         int reg_rcv_callback(T *obj_pnt);
9     void unreg_rcv_callback(int);
10 };

```

Cryptography. Adapting cryptographic algorithms to embedded systems is a difficult task due to resource limitations. Unlike the routing case, we avoid covering all special cases of crypto algorithms. We provide a simple concept with algorithm implementations that will be viable solutions for the tiny sensors.

Our generic concept for a crypto algorithm consists of five methods. We provide methods for key setup, encryption and decryption of data blocks. The concept looks as follows:

```

1 concept Crypto {
2     void set_os(OsModel* os);
3     void enable(void);
4     void disable(void);
5     void key_setup(node_id_t, data_t* key);
6     void encrypt(data_t* in, data_t* out, size_t length);
7     void decrypt(data_t* in, data_t* out, size_t length);
8 };

```

Secure Routing. In this section, we describe how the individual routing and cryptographic implementations can be combined to result in secure routing algorithms. Note that any available routing implementation can be combined with any available crypto algorithm without a single change in their code.

We therefore implement the routing concept, and accept a routing algorithm and a crypto algorithm as template parameters. Internally, we only use the passed types. For example, when the secure routing is enabled, it in turn enables the routing and crypto algorithm. When a message is sent, it first encrypts the passed bytes, and then passes the encrypted data to the routing algorithm. Then, when a message is received at the destination, it is first decrypted, and then passed to the registered receivers. The secure routing looks then as follows:

```

1 template<typename Routing,
2         typename Crypto>
3 class SecureRouting {
4     void set_os(OsModel* os);
5     [...] // all methods described in the routing concept
6     void unreg_recv_callback(int);
7     Routing routing_;
8     Crypto crypto_;
9 };

```

Since it implements the routing concept, it can be passed and used by any application that deal with routing algorithms. However, the process of both encryption and decryption is completely transparent.

6 Experimental Results

In order to demonstrate the efficiency of our generic approach, we ran different experiments on supported platforms. We evaluated two main parts of the Wiselib: First, the overhead of the connection to the underlying OS; second, properties of implementations of a first set of algorithms.

6.1 External Interface

We tested the performance of Wiselib system calls compared to native OS calls on three different platforms. The results are shown in Table 3.

OS calls that are short enough to be directly inlined by the compiler, such as sending a message on iSense platforms or reading the node ID in Contiki do not have any overhead. However, other parts in the OS connection produce a small overhead due to an additional layer of indirection. This is mainly because of incompatibilities between C function pointers and C++ member function pointers, and a required translation between them. But as shown in the performance

Table 3. Performance costs of Wiselib calls compared to native OS calls

	iSense			Contiki			ScatterWeb		
	Native	Wiselib	Cost	Native	Wiselib	Cost	Native	Wiselib	Cost
Read ID	2 μ s	2 μ s	0%	<1 μ s	<1 μ s	0%	<1 μ s	<1 μ s	0%
Send Message	282 μ s	282 μ s	0%	336 μ s	345 μ s	3%	898 μ s	921 μ s	3%
Set Timer	135 μ s	141 μ s	4%	77 μ s	100 μ s	30%	20 μ s	43 μ s	115%

Table 4. Code-size overhead of OS facets. Shown is ROM (.text) and RAM (.bss + .data) in bytes.

	iSense	Contiki	ScatterWeb
Radio	856+240	428+ 72	316+ 40
Timer	868+240	352+210	270+ 80

evaluation, this overhead is very small—if at all, then only in terms of microseconds. Similar delays would also be produced by alternative approaches, but by using C++ and templates the compiler is able to remove this overhead wherever reasonable. This is possible due to the implicit inline declaration of methods.

Time efficiency is only one performance measure; the other is code space. We evaluated the needed size for the two OS facets radio and timer for different platforms. The results are shown in Table 4.

Because the concepts for radio and timer were kept simple, each implementation required at most a few hundred lines of code. This led not only to a slight structure, but also enhanced maintenance issues. In addition, even the integration of a completely new platform can be done without too much effort.

Especially the facets for the ScatterWeb platform show a small amount of overhead of less than 600 bytes in ROM, and 120 bytes in RAM. Even the 1.7kB of iSense are tolerable, since it is a 32bit-platform with corresponding overhead in machine language instructions.

An important factor when estimating the code-size overhead is that it is constant, and thus do not grow with the integration of further algorithms. The interfaces also provide a powerful abstraction of the underlying OS, facilitating implementations of many additional algorithm categories.

6.2 Algorithms

We implemented different algorithms for the routing concept: DSDV, DSR, a simple tree routing, and a flooding algorithm. Each algorithm has been compiled for, and tested on each supported platform. Table 5 shows the resulting code sizes and initial RAM usage for the several platforms.

Table 5. Evaluation of code size as ROM size (.text) and RAM size (.bss + .data) in bytes.

Algorithm	16-bit OS		32-bit OS	Simulators	
	Contiki	ScatterWeb	iSense	Shawn	TOSSIM
DSDV	1446+ 72	1466+ 72	4776+136	4351+ 4	19146+ 4
DSR	1964+338	1716+238	5396+356	6918+ 4	20845+ 4
Tree	920+ 16	724+ 14	4060+ 24	2974+ 4	9946+ 4
Flooding	1122+ 50	762+ 34	2864+ 68	2260+ 4	10192+ 4

It is clearly visible that our algorithm implementation perfectly fits into the target platforms, as the impact of the generality of the code is very low, in terms of both code and memory. However, the given code sizes show only the pure demand of the algorithm—without considering the external interface.

Table 6. Stack latency in Wiselib (measured on the iSense devices)

	Dummy Routing	Dummy Routing, Dummy Crypto	DSDV Routing	DSDV Routing, Dummy Crypto
Latency	6.08 msec	6.09 msec	6.72 msec	6.75 msec

Table 7. Comparison between Wiselib and TinyECC, for encryption/decryption run-time

Hardware	TinyECC optimized		TinyECC		Wiselib	
	Encrypt	Decrypt	Encrypt	Decrypt	Encrypt	Decrypt
TelosB	6.53sec	4.25sec	84.9sec	42.73sec	114.78sec	56.02sec
MicaZ	3.9sec	2.6sec	61.4sec	31.87sec	118.4sec	57.84sec
Tmote Sky	3.27sec	2.12 sec	42.55sec	21.41sec	115.98sec	56.91sec
iSense	-	-	-	-	22.9sec	11.84sec
ScatterWeb	-	-	-	-	102.93sec	50.42sec

Each of the routing models can also be combined with a crypto algorithm—as shown in Section 5. The first point of interest is the overhead of multiple layers of algorithms are. We estimated the average latency by the Wiselib layers. The experiments were held on the iSense platform. The latency was measured as the average of 200 message exchanges: a) through a dummy routing algorithm and a dummy routing algorithm combined with a dummy crypto algorithm and b) through a DSDV routing algorithm and a DSDV routing algorithm combined with a dummy crypto algorithm. We conclude that stack latency overhead is minimal, as shown in Table 6.

As a second experiment regarding the combination of routing and crypto algorithms, we estimated the run-time of a crypto algorithm (Elliptic Curve Integrated Encryption Scheme) through Wiselib for various platforms, and we compared it with that of TinyECC[15] in Table 7. We did not focus on optimizing the code; that is why TinyECC runtime is generally faster. However, our algorithm can be executed on a variety of platforms.

Also, with the aid of template specializations—as also used in message delivery—code can be optimized and adapted for certain platforms. Depending on the compilation process, the compiler can select exactly the code that fits best for the current platform. For example, when an algorithm is compiled for iSense, the AES hardware could be used for the crypto routines.

7 Accessing the Wiselib

There are different demands for the users of the Wiselib. *Application developers* are interested in stable algorithms that were thoroughly tested for all supported platforms. They do not contribute own implementations to the Wiselib; instead, they only integrate existing algorithms in their applications. *Algorithm developers* on the other hand contribute code to the Wiselib. Algorithms may be under development and can not be ensured to run on each platform.

We therefore provide two distributions: *Stable* and *Testing*. The former contains only algorithms that were run through different tests, particularly for each supported platform. Concepts that are implemented for the stable distribution

are also expected not to be changed anymore, if not strongly needed. In contrast, the testing distribution contains newly implemented algorithms. They may not be tested on each platform—in particular since not each algorithm developer has each platform available. This can also lead to changes in concepts, when it is noticed that not all platforms can be covered satisfactorily. In general, the objective here is to release early, and release often.

The Wiselib can be accessed under <http://wisebed.eu/wiselib>. There is a Wiki available that contains documentation. In addition, there is also a Trac running to report software bugs and collect suggestions for improvement.

8 Conclusion and Future Work

In this paper, we have introduced our generic algorithm library for wireless sensor nodes, the Wiselib. It is aimed at allowing algorithm researchers to quickly implement distributed algorithms on actual sensor nodes. The implementation process requires no deep understanding of the target platform, as the library provides a unified API that abstracts the technical details. Unlike all other approaches with the same goal, or at least the ones we are aware of, Wiselib algorithms suffer next to no runtime or memory overhead from the generality.

The Wiselib is written in standard ISO C++, using advanced OO techniques to encapsulate the operating system and to allow complex OO architectures that can be fully resolved by an optimizing compiler. Specifically, the Wiselib makes heavy use of templates, as they are resolved at compile time, leaving no binding efforts to runtime. Certainly, generality does not allow to provide highly optimized code. Fortunately, our open design allows to provide such hardware specific optimizations without hindering the generality of the algorithm implementation. This is extremely important since algorithm development can be decoupled from application development where platform specific optimizations are performed.

We demonstrate the effectiveness of the Wiselib by implementing a number of routing algorithms and cryptography algorithms. We show that the produced code is very lean and it works on a large variety of sensor platforms. The library allows us to easily stack different types algorithms with almost zero overhead. We build upon this feature and demonstrate the ability to interchange algorithms without affecting the operation of other algorithms at different stack level. These features essentially provide endless possibilities to application developers as more algorithms and algorithmic concepts are introduced in Wiselib.

We expect the Wiselib to grow much beyond the current state, and to become a standard tool for WSNs in the near future. We also wish to look into other categories of algorithms such as MAC layer protocols, energy saving schemes and topology control protocols.

Acknowledgement. This work has been partially supported by the European Union under contract number ICT-2008-224460 (WISEBED).

References

1. Alexandrescu, A.: Modern C++ Design. Addison-Wesley, Reading (2001)
2. Boost, <http://www.boost.org>

3. Boulis, A., Han, C.-C., Srivastava, M.B.: Design and implementation of a framework for efficient and programmable sensor networks. In: Proceedings of MobiSys 2003, pp. 187–200. ACM, New York (2003)
4. CGAL: Computational Geometry Algorithms Library, <http://www.cgal.org>
5. Dunkels, A.: Poster abstract: Rime – a lightweight layered communication stack for sensor networks. In: Proceedings of EWSN 2007, Poster/Demo session (2007)
6. Dunkels, A., Gronvall, B., Voigt, T.: Contiki - a lightweight and flexible operating system for tiny networked sensors. In: LCN 2004: Proceedings of the 29th Annual IEEE International Conference on Local Computer Networks (2004)
7. Gay, D., Levis, P., von Behren, R., Welsh, M., Brewer, E., Culler, D.: The nesc language: A holistic approach to networked embedded systems. In: Proceedings of Programming Language Design and Implementation, PLDI (2003)
8. GNUMP: GNU Multiple Precision Arithmetic Library, <http://gmplib.org/>
9. Gummadi, R., Gnawali, O., Govindan, R.: Macro-programming wireless sensor networks using kairos. In: Prasanna, V.K., Iyengar, S.S., Spirakis, P.G., Welsh, M. (eds.) DCOSS 2005. LNCS, vol. 3560, pp. 126–140. Springer, Heidelberg (2005)
10. He, Z., Österlind, F., Dunkels, A.: An adaptive communication architecture for wireless sensor networks. In: Proceedings of ACM SenSys (2007)
11. Hnat, T.W., Sookoor, T.I., Hooimeijer, P., Weimer, W., Whitehouse, K.: Macrolab: a vector-based macroprogramming framework for cyber-physical systems. In: Proceedings of the ACM SenSys 2008, New York, NY, USA, pp. 225–238 (2008)
12. ISO/IEC JTC1 SC22 WG21. ISO/IEC TR 18015: Technical Report on C++ Performance. Technical report (February 2006)
13. Kahn, J.M., Katz, R.H., Pister, K.S.J.: Next century challenges: mobile networking for “smart dust”. In: MobiCom 1999: Proceedings of the 5th annual ACM/IEEE international conference on Mobile computing and networking, pp. 271–278. ACM, New York (1999)
14. Levis, P., Culler, D.: Mate: A tiny virtual machine for sensor networks. In: International Conference on Architectural Support for Programming Languages and Operating Systems, San Jose, CA, USA (October 2002)
15. Liu, A., Ning, P.: TinyECC: A Configurable Library for Elliptic Curve Cryptography in Wireless Sensor Networks. In: IPSN 2008: Proceedings of the 7th international conference on Information processing in sensor networks (2008)
16. Sauter, R., Marrón, P.J., Dunkels, A., Voigt, T., Tsiftes, N., Finne, N., Österlind, F., Eriksson, J.: Demo abstract: Towards interoperability testing for wireless sensor networks with cooja/mspsim. In: Roedig, U., Sreenan, C.J. (eds.) EWSN 2009. LNCS, vol. 5432. Springer, Heidelberg (2009)
17. Shaylor, N., Simon, D.N., Bush, W.R.: A java virtual machine architecture for very small devices. In: LCTES 2003: Proceedings of the 2003 ACM SIGPLAN conference on Language, compiler, and tool for embedded systems (2003)
18. Simon, D., Cifuentes, C.: The squawk virtual machine: Java on the bare metal. In: OOPSLA 2005, pp. 150–151. ACM, New York (2005)
19. Stroustrup, B.: The C++ Programming Language. Addison-Wesley, Reading (2000)
20. TinyOS, <http://www.tinyos.net>
21. Vandevorde, D., Josuttis, N.M.: C++ Templates: The Complete Guide. Addison-Wesley, Reading (2003)
22. Whitehouse, K., Tolle, G., Taneja, J., Sharp, C., Kim, S., Jeong, J., Hui, J., Dutta, P., Culler, D.: Marionette: using rpc for interactive development and debugging of wireless embedded networks. In: IPSN 2006, New York, USA, pp. 416–423 (2006)